

SOLAR'S MOST TRUSTED



# REC N-PEAK SERIES

PREMIUM MONO N-TYPE  
SOLAR PANELS WITH  
WORLD-CLASS PERFORMANCE



MONO N-TYPE: THE  
MOST EFFICIENT C-SI  
TECHNOLOGY



NO LIGHT INDUCED  
DEGRADATION



SUPER-STRONG  
FRAME UP TO 7000 PA  
SNOW LOAD




FLEXIBLE  
INSTALLATION  
OPTIONS



FEATURING REC'S  
PIONEERING  
TWIN DESIGN




HIGH POWER  
FOR 25 YEARS

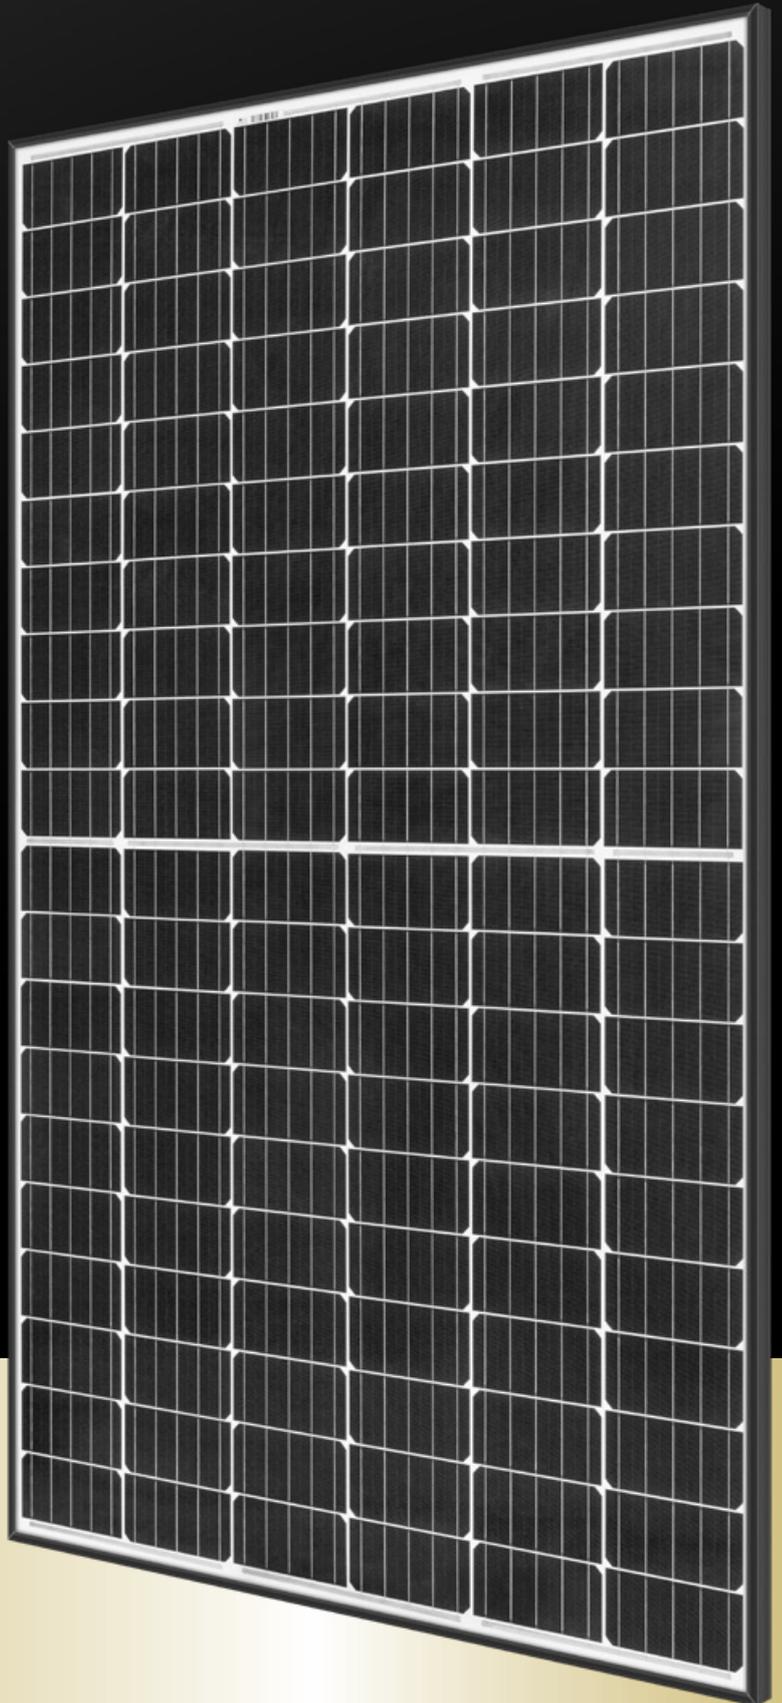

330  
WP  
POWER



# REC N-PEAK SERIES

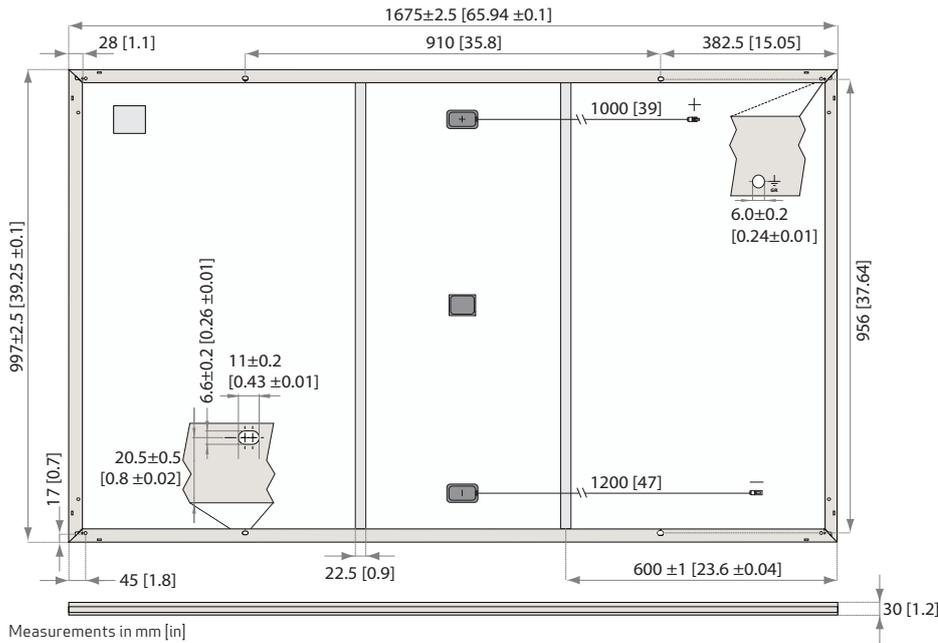

## GENERAL DATA

Cell type:	120 half-cut mono c-Si n-type cells 6 strings of 20 cells in series
Glass:	3.2 mm solar glass with anti-reflection surface treatment
Backsheet:	Highly resistant polymeric construction
Frame:	Anodized aluminum (black)
Junction box:	3-part, 3 bypass diodes, IP67 rated in accordance with IEC 62790
Cable:	4 mm <sup>2</sup> solar cable, 1.0 m + 1.2 m in accordance with EN 50618
Connectors:	Stäubli MC4 PV-KBT4/KST4 (4 mm <sup>2</sup> ) in accordance with IEC 62852 IP68 only when connected
Origin:	Made in Singapore

## MECHANICAL DATA

Dimensions:	1675 x 997 x 30 mm
Area:	1.67 m <sup>2</sup>
Weight:	18 kg

## ELECTRICAL DATA @ STC

### Product code\*: RECxxxNP

	305	310	315	320	325	330
Nominal Power - P <sub>MAX</sub> (Wp)	305	310	315	320	325	330
Watt Class Sorting - (W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Nominal Power Voltage - V <sub>MPP</sub> (V)	33.3	33.6	33.9	34.2	34.4	34.6
Nominal Power Current - I <sub>MPP</sub> (A)	9.17	9.24	9.31	9.37	9.46	9.55
Open Circuit Voltage - V <sub>OC</sub> (V)	39.3	39.7	40.0	40.3	40.7	41.0
Short Circuit Current - I <sub>SC</sub> (A)	10.06	10.12	10.17	10.22	10.28	10.33
Panel Efficiency (%)	18.3	18.6	18.9	19.2	19.5	19.8

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m<sup>2</sup>, temperature 25°C), based on a production spread with a tolerance of P<sub>MAX</sub>, V<sub>OC</sub> & I<sub>SC</sub> ±3% within one watt class. \*Where xxx indicates the nominal power class (P<sub>MAX</sub>) at STC above.

## MAXIMUM RATINGS

Operational temperature:	-40 ... +85°C
Maximum system voltage:	1000 V
Maximum test load (front):	+ 7000 Pa (713 kg/m <sup>2</sup> )*
Maximum test load (rear):	- 4000 Pa (407 kg/m <sup>2</sup> )*
Max series fuse rating:	25 A
Max reverse current:	25 A

\* See installation manual for mounting instructions.  
Design load = Test load / 1.5 (safety factor)

## ELECTRICAL DATA @ NMOT

### Product code\*: RECxxxNP

	231	234	238	242	246	250
Nominal Power - P <sub>MAX</sub> (Wp)	231	234	238	242	246	250
Nominal Power Voltage - V <sub>MPP</sub> (V)	31.1	31.4	31.7	32.0	32.2	32.4
Nominal Power Current - I <sub>MPP</sub> (A)	7.41	7.46	7.52	7.57	7.64	7.71
Open Circuit Voltage - V <sub>OC</sub> (V)	36.7	37.1	37.4	37.7	38.0	38.3
Short Circuit Current - I <sub>SC</sub> (A)	8.13	8.17	8.21	8.25	8.30	8.34

Nominal module operating temperature (NMOT: air mass AM1.5, irradiance 800 W/m<sup>2</sup>, temperature 20°C, windspeed 1 m/s).

\*Where xxx indicates the nominal power class (P<sub>MAX</sub>) at STC above.

## TEMPERATURE RATINGS \*

Nominal Module Operating Temperature:	44°C (±2°C)
Temperature coefficient of P <sub>MAX</sub> :	-0.35 %/°C
Temperature coefficient of V <sub>OC</sub> :	-0.27 %/°C
Temperature coefficient of I <sub>SC</sub> :	0.04 %/°C

\* The temperature coefficients stated are linear values

## CERTIFICATIONS



IEC 61215, IEC 61730; UL 61730, MCS 005,  
IEC 62804, IEC 61701, IEC 62716, IEC 62782  
ISO 9001: 2015, ISO 14001: 2004, OHSAS 18001: 2007

**takeaway** take-e-way WEEE-compliant recycling scheme  
for an easy way


## WARRANTY

	Standard	REC ProTrust	
Installed by an REC Certified Solar Professional	No	Yes	Yes
System Size	Any	≤25 kW	25-500 kW
Product Warranty (yrs)	20	25	25
Power Warranty (yrs)	25	25	25
Labor Warranty (yrs)	0	25	10
Power in Year 1	98%	98%	98%
Annual Degradation	0.5%	0.5%	0.5%
Power in Year 25	86%	86%	86%

See warranty documents for details. Some conditions apply.

## LOW LIGHT BEHAVIOUR

Typical low irradiance performance of module at STC:

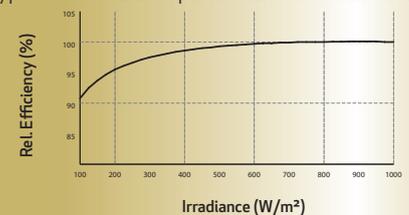

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

**REC**  
www.recgroup.com